


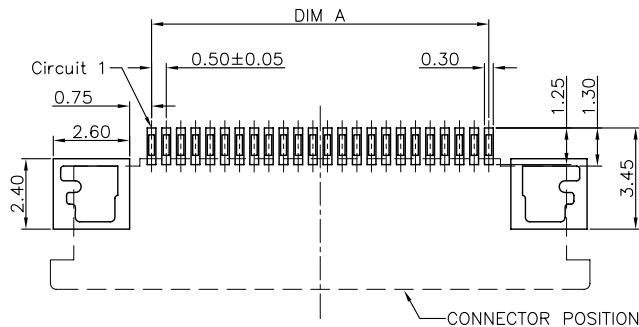
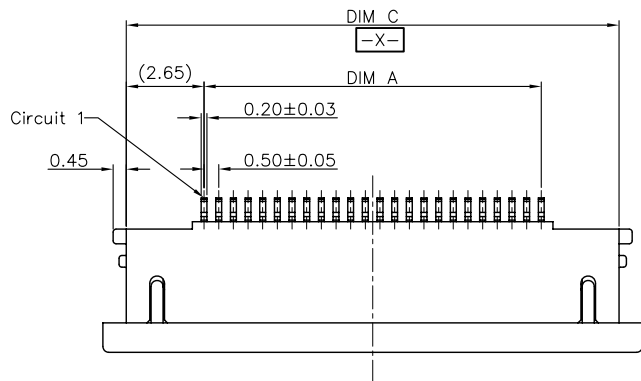







RECOMMENDED P.C.B PATTERN LAYOUT

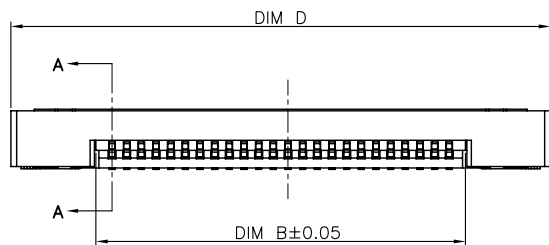

SECTION A-A
SCALE 1:1



SECTION A-A
SCALE 1:1

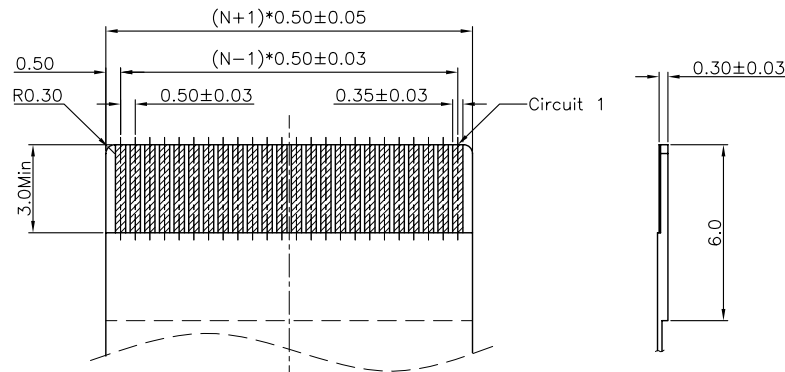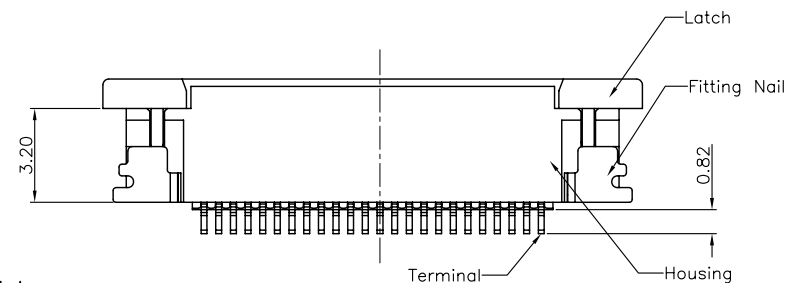

RECOMMENDED FPC/FFC DIMENSION

CKTS	DIM A	DIM B	DIM C	DIM D
4	1.50	2.60	6.80	8.40
5	2.00	3.10	7.30	8.90
6	2.50	3.60	7.80	9.40
7	3.00	4.10	8.30	9.90
8	3.50	4.60	8.80	10.40
9	4.00	5.10	9.30	10.90
10	4.50	5.60	9.80	11.40
11	5.00	6.10	10.30	11.90
12	5.50	6.60	10.80	12.40
13	6.00	7.10	11.30	12.90
14	6.50	7.60	11.80	13.40
15	7.00	8.10	12.30	13.90
16	7.50	8.60	12.80	14.40
17	8.00	9.10	13.30	14.90
18	8.50	9.60	13.80	15.40
19	9.00	10.10	14.30	15.90
20	9.50	10.60	14.80	16.40
21	10.00	11.10	15.30	16.90
22	10.50	11.60	15.80	17.40
23	11.00	12.10	16.30	17.90
24	11.50	12.60	16.80	18.40
25	12.00	13.10	17.30	18.90
26	12.50	13.60	17.80	19.40
27	13.00	14.10	18.30	19.90
28	13.50	14.60	18.80	20.40
29	14.00	15.10	19.30	20.90
30	14.50	15.60	19.80	21.40
31	15.00	16.10	20.30	21.90
32	15.50	16.60	20.80	22.40
33	16.00	17.10	21.30	22.90
34	16.50	17.60	21.80	23.40
35	17.00	18.10	22.30	23.90
36	17.50	18.60	22.80	24.40
37	18.00	19.10	23.30	24.90
38	18.50	19.60	23.80	25.40
39	19.00	20.10	24.30	25.90
40	19.50	20.60	24.80	26.40
41	20.00	21.10	25.30	26.90
42	20.50	21.60	25.80	27.40
43	21.00	22.10	26.30	27.90
44	21.50	22.60	26.80	28.40
45	22.00	23.10	27.30	28.90
46	22.50	23.60	27.80	29.40
47	23.00	24.10	28.30	29.90
48	23.50	24.60	28.80	30.40
49	24.00	25.10	29.30	30.90
50	24.50	25.60	29.80	31.40
51	25.00	26.10	30.30	31.90
52	25.50	26.60	30.80	32.40
53	26.00	27.10	31.30	32.90
54	26.50	27.60	31.80	33.40
55	27.00	28.10	32.30	33.90
56	27.50	28.60	32.80	34.40
57	28.00	29.10	33.30	34.90
58	28.50	29.60	33.80	35.40
59	29.00	30.10	34.30	35.90
60	29.50	30.60	34.80	36.40

Note:

1. Material:

1.1 Housing: thermoplastic high temp.

UL94V-0; Color: natural.

1.2 Latch: thermoplastic high temp.

UL94V-0; Color: black.

1.3 Terminal: copper alloy T=0.20mm

1.4 Fitting Nail: copper alloy T=0.20mm

2. Finsh:

2.1 Terminal:

Underplating: matt Tin overall.

2.2 Fitting Nail:

Underplating: matt Tin overall.

3. Product must comply HF RoHS specification.

PART NO. SPEC

AF3S XX B * S O T 1 O_QOR2

NO. OF CKTS

CONTACT TYPE

A:Upper

B:Lower

PACKING CODE

P:Tape & Reel

T:Tube

PLATING CODE

0:MATT-Tin 90-120u"

1:GOLD FLASH 1u"

2:GOLD FLASH 2u"

3:GOLD FLASH 3u"

A:Point Gold-plated 1u"

B:Point Gold-plated 2u"

C:Point Gold-plated 3u"

Rev	Change Description	Date	Revisor
1	初版发行	2011/12/23	Allan
2	变更内容	日期	制/修订人

CUSTOMER DRAWING

Tolerance (未注公差)	Size (规格)
0.0 ±0.15 0° ±3°	A4
0.00 ±0.10 0° ±3°	MM
0.000 ±0.05 0° ±1°	Scale (比例): 1:1
Project View (投影视角)	Page (页数): 1 OF 1
Rev (版本): A	Rev (版本): A

深圳市顺宏康科技有限公司

Product Name (产品名称): 0.5Pitch H=2.0 FPC ZIF CONN. R/A SMT Lower TYPE(4)

Product No (产品料号): AF3SXXB*SOT10_QOR2 SHK-10275

Designer (设计): Steven 12/23/11

Checked (审核): Allan 12/23/11

Approved (核准):