


 SMT SOLDER AREA.
 KEEP OUT AREA (No Circuit)
 THESE AREA SHOULD BE FREE OF ANY CONDUCTIVE TRACES. No Circuit

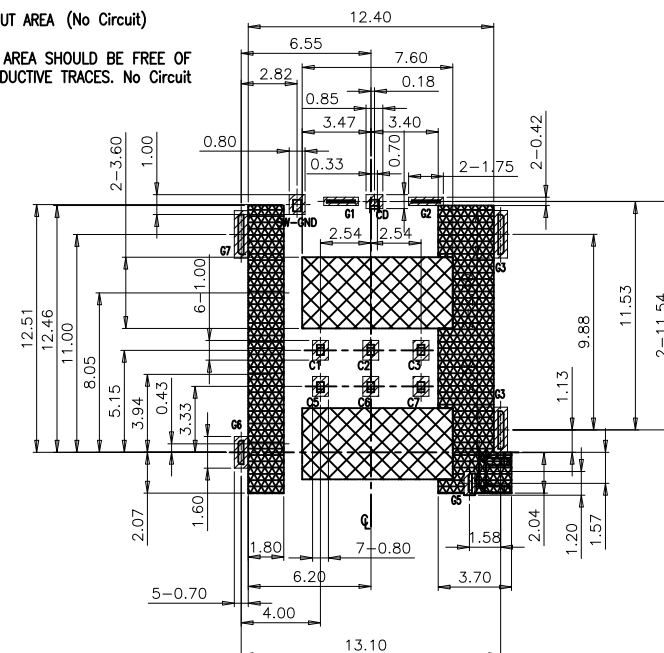


RECOMMENDED PCB LAYOUT (TOLERANCE: ± 0.05)	NO PATTERN AREA (TOLERANCE: ± 0.05)
--	---

SW Circuit Description for Connector:

CONNECTOR	PART NO:	PLATING
PIN PUSH Nano SIM CONNECTOR(7pin) 1.35mm HEIGHT	NSOPL-130006-25G	Shell Solder: G/F; 30u"Ni PLATING CONTACT: 10u"Ag solder: 1u"Ag; 60u"Ni PLATING HOUSING(No add any recycling material)

Nano SIM Circuit Description:

PIN No.	FUNCTION
C1	VCC
C2	RST
C3	CLK
C4	RESERVED
C5	GND
C6	VPP
C7	I/O
C8	RESERVED

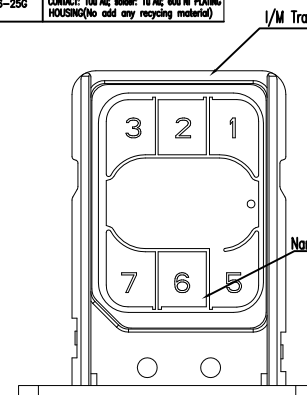

CARD INSERTION STATE	DETECT SWITCH CIRCUIT STATE	SCHEMATIC
TRAY MATED	OPENED	DETECT PIN [CD] 
TRAY UNMATED	CLOSED	DETECT PIN [CD] 

6	CD GND		1PCS	C5240
5	BAR		1PCS	SUS304-H
4	LEVER		1PCS	SUS304-H
3	SHELL		1PCS	SUS304-3/4H
2	TERMINAL		1SET	C5240
1	HOUSING		1PCS	LCP BLACK
NO.	PART NAME	PART NO.	QUANTITY	COLOR/MATERIAL

UNLESS OTHERWISE
SPECIFIED TOLERANCES

DECIMALS:		ANGLES:	
X	: ± 0.5	X	: $\pm 2^\circ$
X.X	: ± 0.20	X.X	: $\pm 1^\circ$
X.XX	: ± 0.10		

深圳市顺宏康科技有限公司

TITLE	NANO SIM Card 6pin 1.35H CONN. WITH LEVER (WITH DTECT NORMAL OPEN)			
DWN	ALLEN	PART NO.	SHK-10383	
CHKD	KEVIN	SCALE:1:1	UNIT: mm	
APVD	ERIC.W	SIZE: A3	SHEET:1 OF 1	REV: A2

CUSTOMER COPY

NOTES:

1. MATERIAL:
SEE TABLE (Housing can't add any recycled material)
2. SPECIALITY:
 - 2.1 Rated current:1.0A
 - 2.2 Rated voltage:30V
 - 2.3 Contact Resistance:50mohm MAX
 - 2.4 Insulation Resistance:1000Mohm MIN 500V DC
 - 2.5 Dielectric withstanding voltage: 500V DC.
 - 2.6 Solder ability:250? °C, 10±0.5s.
 - 2.7 Durability:3000 Cycles
 - 2.8 Mating and Unmating force
Insertion Force 10N Max; Withdrawal Fore 2N Min
- 2.9 Operating condition:
Temperature-40°C~+85°C; Humidity 80% R.H MAX

3.D/C AREA DESCRIBE: JXXXXXX

YEARS:2017=7 

WEEK:01...56



DAY:1=MON, 2=TUN...

4.COPLANARITY: BEFORE IR 0.08mm Max
AFTER IR 0.08 mm Max

5.PLEASE CONTACT KRCOON SALES REPRESENTATIVE TO
VERIFY PRODUCT DETAILS & AVAILABILITY






REV.	ECN NO OR DESCRIPTION	REVISED	DATE
1	PROPOSE ONLY	ALLEN	2016.08.10

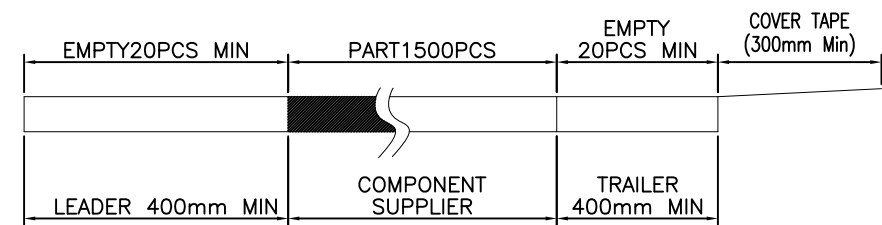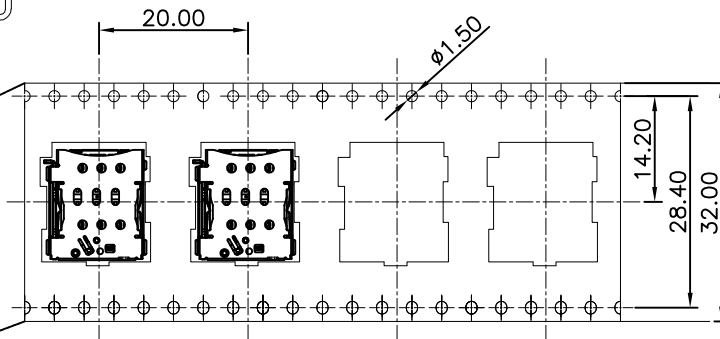

NOTES

- NUMBER OF CONNECTORS: 1500PCS/REEL
- LEAD TAPE LENGTH
- QUANTITY: 9000PCS/CARTON
- WEIGHT :
 - NET WEIGHT : 4.50Kg/CARTON
 - GROSS WEIGHT : 8.50Kg/CARTON

COVER TAPE PEELING ANGLE: 165°~180°
PEELING FORCE: 20~130g

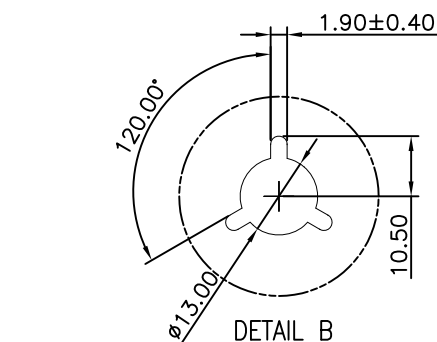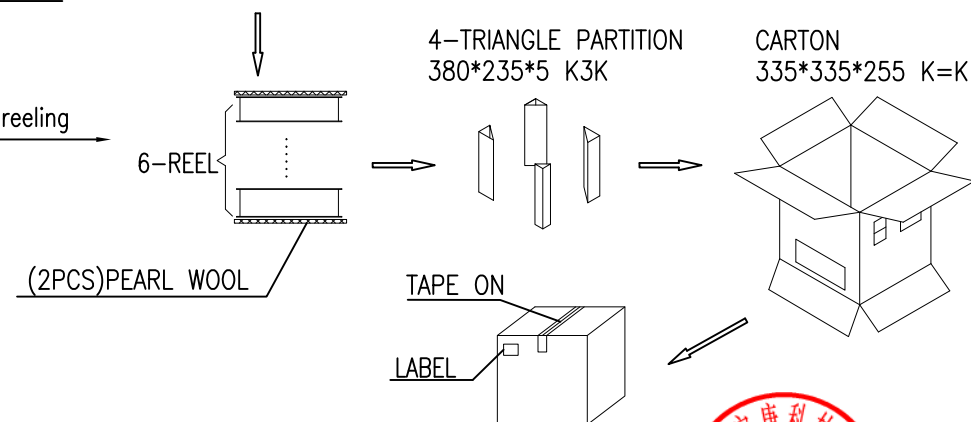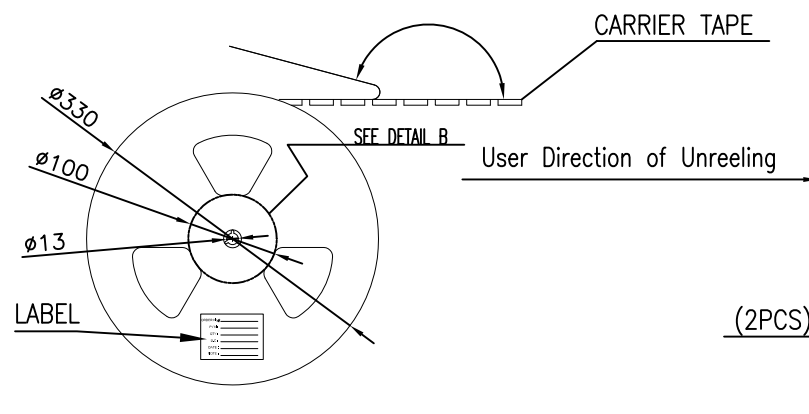

UNLESS OTHERWISE SPECIFIED TOLERANCES		深圳市顺宏康科技有限公司			
DECIMALS:	ANGLES:	TITLE	NANO SIM Card 6pin 1.35H CONN. 包装规范		
X :±0.5	X :±2°	DWN	ALLEN	PART NO.	SHK-10383
X.X :±0.20	X.X :±1°	CHKD	KEVIN	SCALE: 1:1	UNIT: mm
X.XX :±0.10		APVD	ERIC.W	SIZE: A3	SHEET: 1 OF 1
		CUSTOMER COPY			