
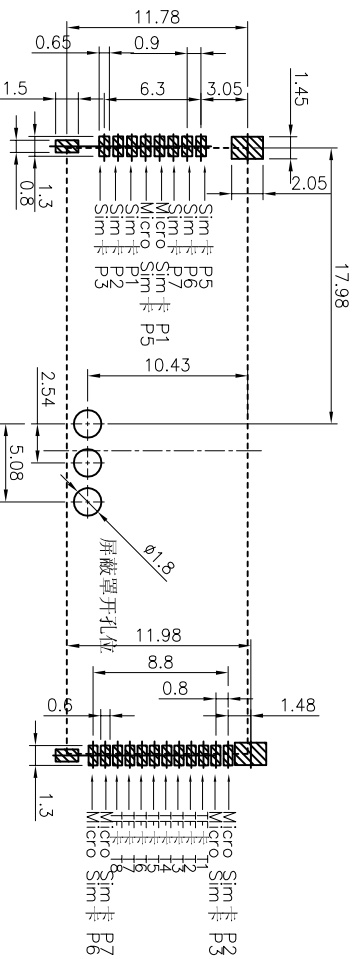
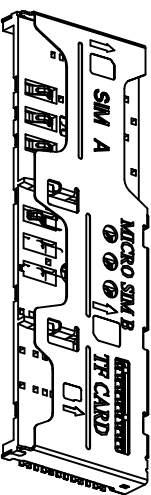


REV.	ECN NO OR DESCRIPTION	REVISED	DATE
1	PROPOSE ONLY	ALLEN	2013.11.28

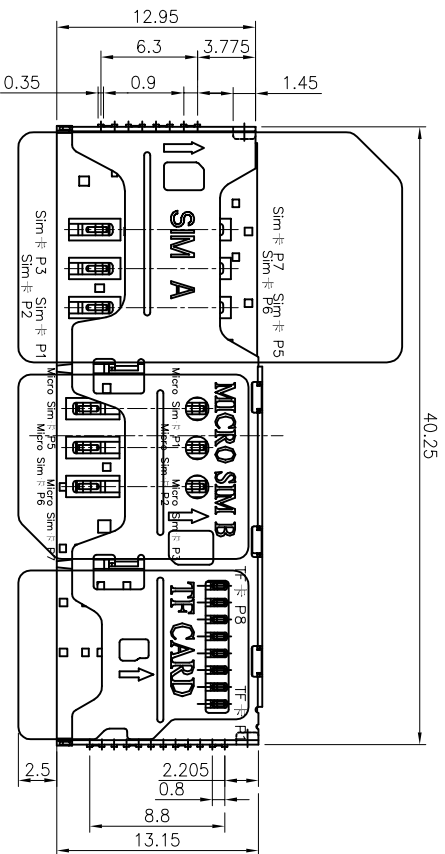

NOTE:
Material & Finish:
Housing:High Temperature Thermoplastic,Color Black UL 94V-0
Contacts&Detect:Phosphor Bronze,
Contact Area See Table A, Solder Tail Gold Flash.
Shell&Lever:Stainless Steel, Gold Flash

2. Circuit Diagram For Switch(see table A)
- 3-1.Current Rating :0.5mA max.
- 3-2.Contact Resistance:100mOhms max
- 3-3.Insulation Resistance:1000MOhms min./500VDC
- 3-4.Dielectric Withstanding Voltage:500VAC/1minute
- 3-5.Operating Temperature:-25C to+85C
- 3-6.Mating Cycles:5,000 Insertions
4. Product Compliant to Rohs Directive 2002/95/EC and ELV 2000/53/EC
5. Please Contact KRCOMM Sales Representative to Verify Product Details.
6. PART No.:

TS 0 DL - 34 01 20 - 06 G
TF+SIM CON -
0=WITHOUT POST
DL=DUAL TYPE.
34=HEIGHT 3.4mm PCB

8P	描述	No.	描述
P1	Vcc	T1	DATA2
P2	RST	T2	CD/DAT3
P3	CLK	T3	CMD
--	Reserved	T4	VDD
P5	GND	T5	CLK
P6	Vpp	T6	Vss
P7	I/O	T7	DAT0
--	Reserved	T8	DAT1

Micro Sim卡/Sim卡 Pin脚定义 TF卡 Pin脚定义

Recommended PCB Layout
(General tolerance:±0.05)

③		TERMINAL	20	C5210-EH,T=0.12	Au 5u" PLATING
②		BASE INSULATOR	1	LCP+GF30%	BLACK
①		SHELL	1	SUS304-H,T=0.15	APPLY PLATING
NO.		PART NAME	Q'TY	DESCRIPTION	NOTE
UNLESS OTHERWISE SPECIFIED TOLERANCES					
DECIMALS:		ANGLES:		深圳市顺宏康科技有限公司 SHEET:10F 1 REV: A1	
X	±0.5	X	±2°		
X.X	±0.20	X.X	±1°		
X.XX	±0.10				
TITLE					
DWN		ALLEN	PART NO.	TS0DL-340120-06G	
CHKD		KEVIN	SCALE:1:1	UNIT: mm	
APVD		ERIC.W	SIZE: A3	SHEET:10F 1 REV: A1	
CUSTOMER COPY					

CUSTOMER COPY