

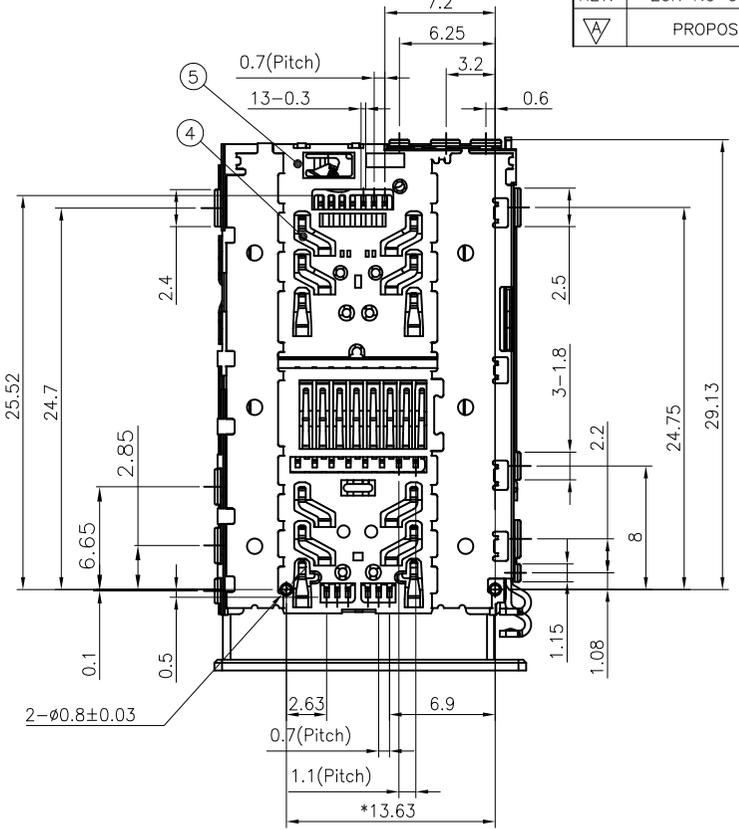
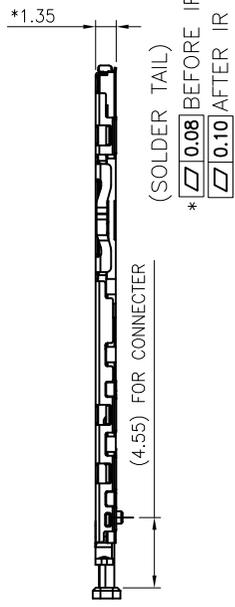


REV.	ECN NO OR DESCRIPTION	REVISED	DATE
△	PROPOSE ONLY	ALLEN	2015.05.23

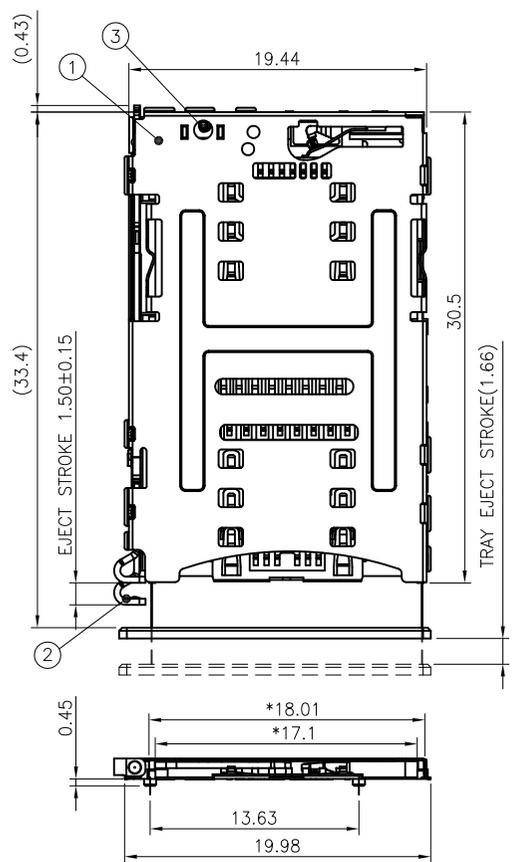

NOTE:

- △ Material & Finish:  
Housing:High Temperature Thermoplastic,Color Black UL 94V-0  
Contacts&Detect:Phosphor Bronze,  
Contact Area See Table △ ,Solder Tail Gold Flash.  
Shell&Lever:Stainless Steel, Gold Flash
- 2. Circuit Diagram For Switch(see table A)
- 3. Specification:  
3-1.Current Rating :0.5mA max.  
3-2.Contact Resistance:100mOhms max  
3-3.Insulation Resistance:1000MOhms min./500VDC  
3-4.Dielectric Withstanding Voltage:500VAC/1minute  
3-5.Operating Temperature:-25°C to +85°C  
3-6.Mating Cycles:5,000 Insertions
- 4. Product Compliant to RoHs Directive 2002/95/EC and ELV 2000/53/EC
- 5. Please Contact KRCONN Sales Representative to Verify Product Details.

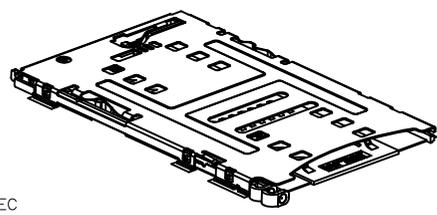

6. PART No.:  
**TS 0 PL - 13 00 20- 02 G**  
 TF&SIM CON. | 0=WITHOUT POST | G=gold flash  
 PL=PUSH LEVER | 02=Product Order | 00=NORMAL TYPE.(ON PCB)  
 13:HEIGHT 1.3mm | Pin NO. 20=20Pin

⑤	HOUSING	1	LCP+GF30%	BLACK
④	TERMINAL	1SET	C5210-EH,T=0.12	Au 1u" PLATING
③	HINGE	1	SUS 304	N/A
②	LEVER	1	SUS 304	N/A
①	SHELL	1	SUS304-H.T=0.15	AU/Ni PLATING
NO.	PART NAME	Q'TY	DESCRIPTION	NOTE

UNLESS OTHERWISE SPECIFIED TOLERANCES

**深圳市顺宏康科技有限公司**

DECIMALS:	ANGLES:	TITLE	1.35H 3in2 with tray (Pin Push)Conn.Assem.		
X :±0.5	X :±2°	DWN	ALLEN	PART NO. TS0PL-130020-02G	
X.X :±0.20	X.X :±1°	CHKD	KEVIN	SCALE:1:1	UNIT: mm
X.XX :±0.10		APVD	ERIC.W	SIZE: A3	SHEET:1OF 1
REV: A					

CUSTOMER COPY

