


REV.	ECN NUMBER	DESCRIPTION	DRAWING	DATE

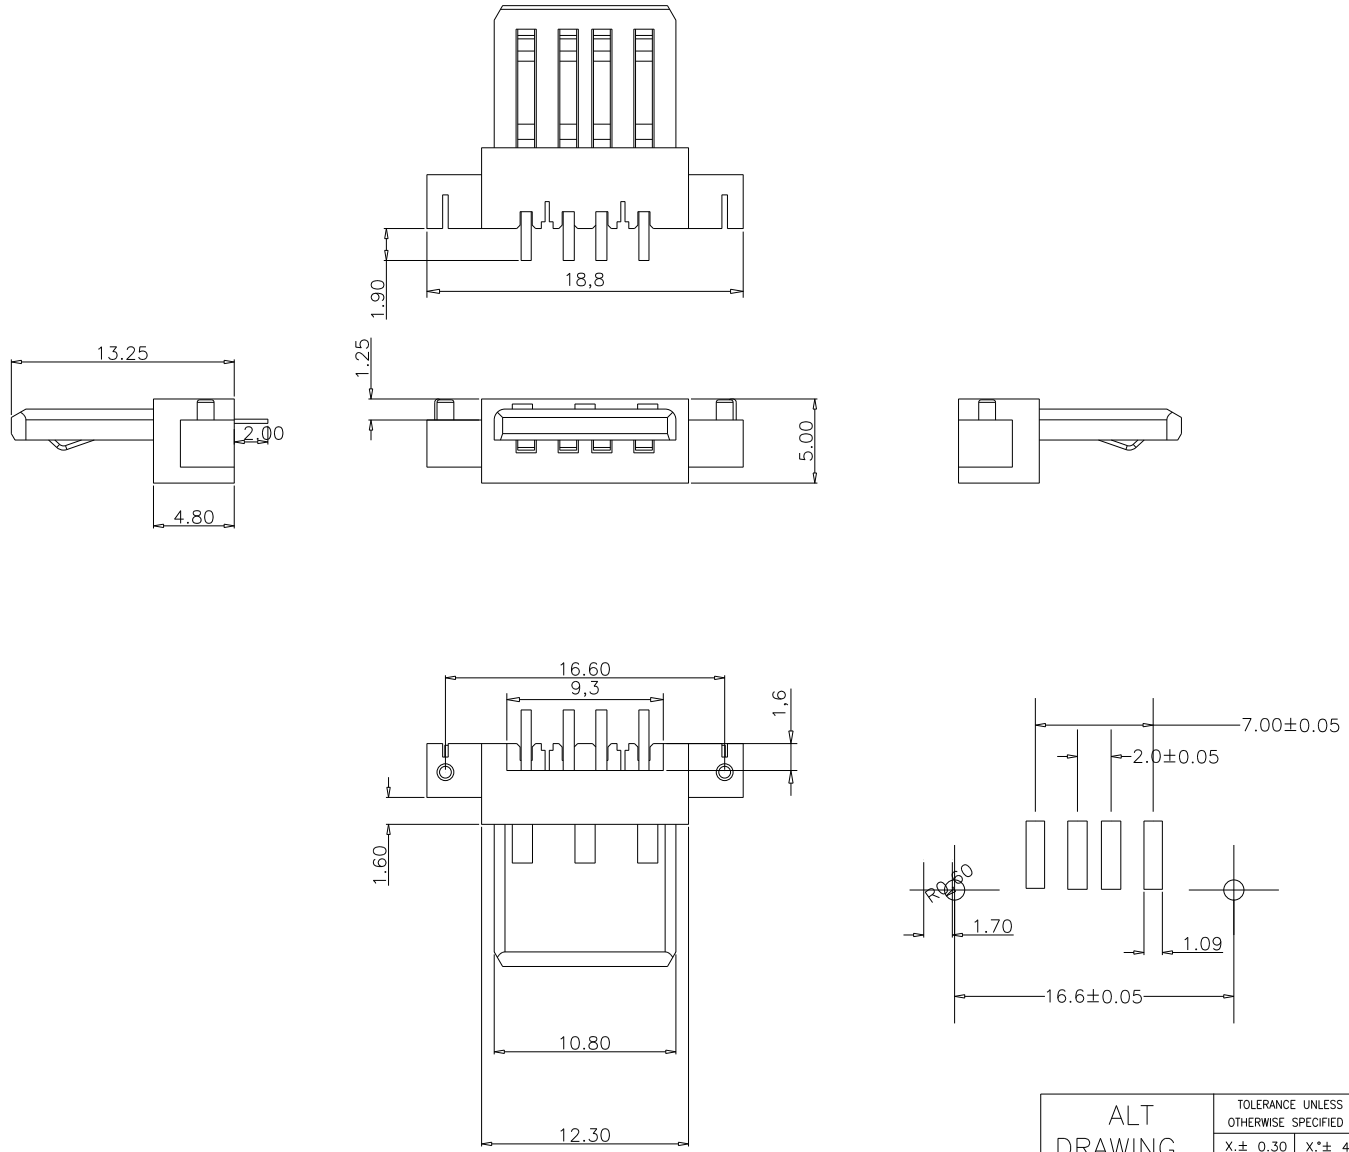

- 1)Electrical:
- 1.1 Contact Resistance: 30 mΩ Max
 - 1.2 Insulation Resistance: 1000MΩ Min
 - 1.3 Withstanding Voltage: 500V DC
 - 1.4 Current rating 1.5AMP Max.
 - 1.5 Total Mating Force: 3.57kg Max.
 - 1.6 Total Unmating force: 0.7kg Min.
 - 1.7temperature Rage: -25° +75°

- 2)Material:
- 2.1 Housing: High temperature Plastics UL94V-0
 - 2.2 SHELL: SPCC OR BRASS
 - 2.3 Contact: Brass

- 3)Finishing:
- 3.1 plating: Au or Sn Over 100u" Ni
 - 3.2 Crimp Terminal :Gold-plating
 - 3.2 Shell:Nickel-plating

ALT DRAWING		TOLERANCE UNLESS OTHERWISE SPECIFIED		深圳市顺宏康科技有限公司					
DRAWIN Yane		X.± 0.30	X*± 4°					PART NO.	DWG NO. SHK-20103
CHECKED		.X± 0.25	.X*± 4°	TITLE	USB AF 单体超薄沉板				
APPROVE		.XX± 0.20		DATE	PROJ.	SIZE	A4	REV.	A
		UNIT	mm						
		SCALE	1:1						
		SHEET	1/1						