
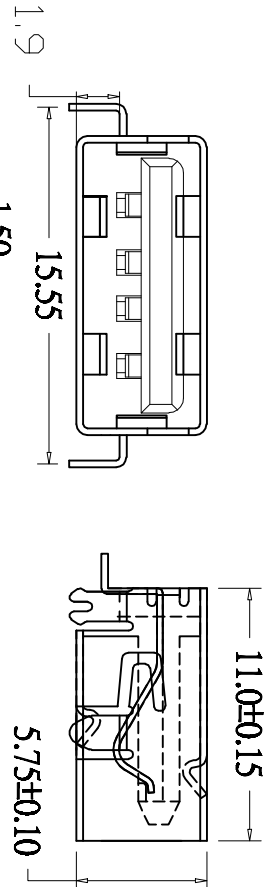


项目 Mapx	变更内容 Modification	日期 Date	修改人 Draw	核准 Approve

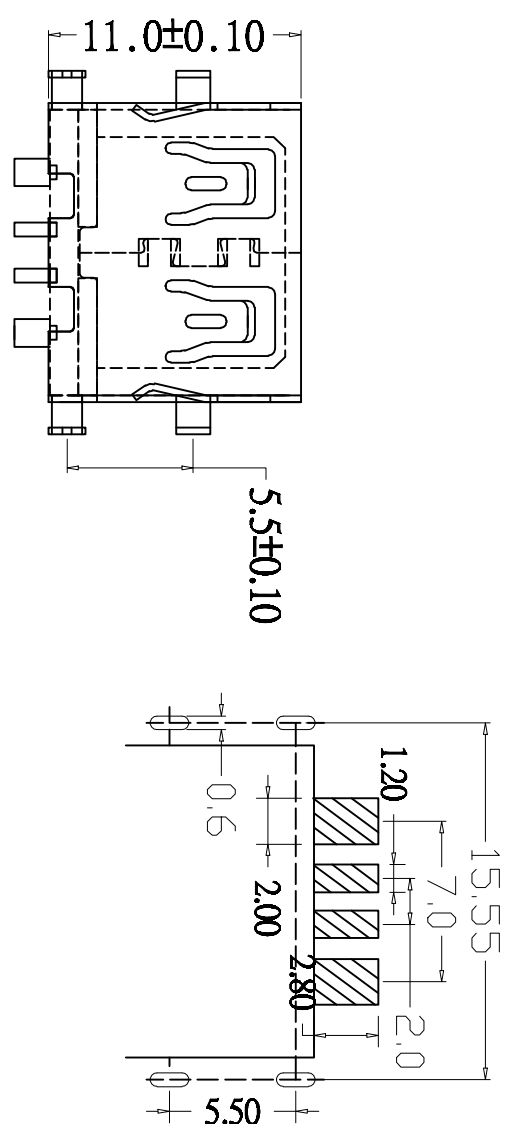

规格说明: Specifications:

电气特性: Electrical:

- 额定电流: Current Rating
3.1A/contact terminal
- 额定电压: Voltage Rating
30V DC
- 接触电阻: Contact Resistance
30 milliohms MAX
- 耐电压: Dielectric Withstanding Voltage:
500 V AC AT Sea Level
- 绝缘阻抗: Insulation Resistance:
1000MEGA ohms MIN

物理性能: Mechanical:

- 插拔力: Connector Mate and Unmate Force
Mate force: 3.57kgf(MAX)
Unmate force: 1.02kgf(MIN)
- 端子保持力: Terminal Retention
1.0kgf(MIN)

原材料: Material:

- 塑壳: Housing:
Hing Temperature Thermoplastics,
- 端子: Contact: Copper Alloy C2680
- 外壳: Shell: Copper Alloy C2680/SPCC

电镀: Finish:

- 端子: Contact: Plated Gold in Mating Area;
Tin On Solder Talls
- 外壳: Shell:
铜壳四周镀80U“(MIN)镍
镀金区域镀100—200U”镀金1U”

Nickel Plating

深圳市顺宏康科技有限公司

成品图 MANUFACTURE DWG		公差 TOLERANCE UNLESS OTHERWISE		日期 DATE		比例 SCALE		版本 VERSION	
X±0.20	X±5°	X±0.10	X±2°	2016.10.20	1:1	1:1	1:1	1.0	1.0
XXX±0.02	XX±1°								