客户图

REV	LTR	DESCRIPTION	DATE	APPROVED
A0		依新料号编码原则发行图面	20150612	

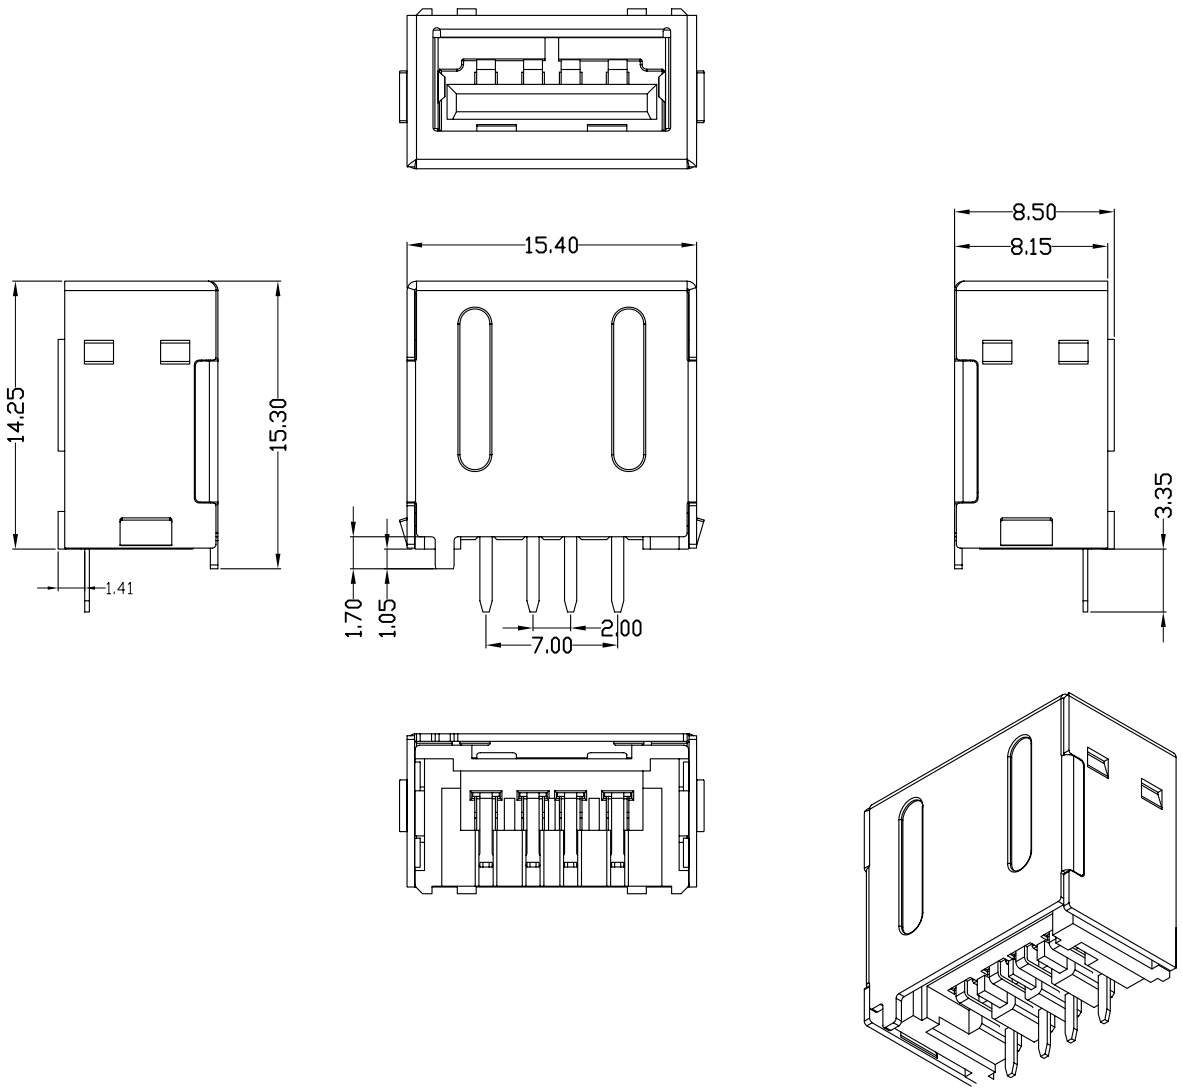

NOTES:
1. MATERIAL SPECIFCATION:
   1) HOUSING:THERMOPLASTIC(UL94V-0)
   2) SHELL: SEE PART NO.
      PLATING: NICKEL
   3) TERMINAL: COPPER ALLOY
      PLATING: GOLD/TIN PLATED;
2. ELECTRICAL CHARACTERISTIC:
   1) VOLTAGE GURRENT RATING: 1AMP,30V DC;
   2) INSULATION RESISTANCE: 1000MΩMIN;
   3) CONTACT RESISTANCE: 30mΩMAX;
   4) WITHSTANDING VOLTAGE: 500V AC;
3. MECHANICAL:
   1) MATING FORCE:3.5 KG MAX
   2) UNMATING FORCE:1.02 KG MIN.

01-4* * * * * *N* * *N-059
1 2 3 4 5 6 7 8 9

1：外壳材质代码：A:黄铜C2680,B:磷铜C5191,
D:单光铁, E:双光铁
2：外壳电镀代码：A:镀镍12H,B:镀镍24H,C:镀镍48H,
D:镀雾镍，E:镀锡，F:镀雾锡
3：中夹片材质及电镀代码：A:SPCC镀镍,B:SPCC镀雾镍,C:SPCC镀锡,
D:SPCC镀雾锡,E:黄铜镀镍,F:黄铜镀雾镍,
G:黄铜镀锡,H:黄铜镀雾锡,I:磷铜镀镍,
J:磷铜镀锡,K:不锈钢，L:不锈钢镀镍
4：胶芯材质代码：A:PBT,B:LCP
5：胶芯颜色代码：1:白色，2:黑色，3:本色
6：端子材质代码：1:黄铜C2680，2:磷铜C5191.
7：端子电镀代码：A:半金锡G/F,B:半金锡3u″,
C:半金锡15u″,D:半金锡30u″
8：环保代码：N:非环保，R:ROHS,S:SONY,F:ROHS+无卤

TOLERANCES .X ±0.30 .XX ±0.20 .XXX ±0.10 ANGLES ±2.00°	深圳市顺宏康科技有限公司
APPD.:	TITLE: USB A/F SMT 单层全包单脚(无后盖)
CHECK:	PART NO.: SHK-20101
DRAWN:	DRAWING NO.: 014-059
	REV.: A/0 · SIZE: A4 · UNIT: M M · SCALE: 1 : 1 · SHEET: 1 / 1